

ADVANCED GEL TECHNOLOGY

RELIABLE, ENVIRONMENTALLY, FRIENDLY and COST EFFECTIVE







The MARINE-RV series is a state of the art line of advanced GEL sealed batteries which has been designed to provide both starting and reserve power for marine and RV applications. POWER BATTERY uses an advanced GEL (patent pending) design which combines the best features of AGM and GEL into one battery. This gives the MARINE-RV battery a longer life and more efficient recharge profile. The end result is a COST EFFECTIVE battery that reduces the cost of ownership to the user.

Battery Model	Electrical Specifications					Dimensions (inches/mm)				Weight lbs/kg	Terminal Type
	Volts	CCA 0°F	MCA32°F	*Res. Cap.	AH@C/20	Length	Width	Height (case)	Top of terminals		
MRG-U1	12	410	510	60	33	7.71/196	5.18/132	6.18/157	7.19/183	26.8/12.2	"L" Type
MRG-22	12	450	550	83	55	9.00/229	5.43/138	8.31/211	9.50/241	38.8/17.6	1/4" Studs
MRG-24	12	700	820	150	76	10.2/259	6.57/167	8.11/206	9.31/236	60.7/27.5	SAE & Studs
MRG-27	12	760	940	180	91	12.0/305	6.57/167	8.20/208	9.37/238	72.0/32.7	SAE & Studs
MRG-31	12	940	1190	200	110	13.5/343	6.76/172	8.50/216	9.31/236	82.0/37.2	1/4" Studs
MRG-31T	12	1100	1280	274	130	13.5/343	6.76/172	10.7/272	10.9/277	101/45.8	1/4" C.I.
MRG-4D	12	2200	2500	420	200	21.0/533	8.50/216	8.88/226	10.0/254	152/69.0	SAE
MRG-4DX	12	2585	2940	494	225	21.0/533	8.50/216	8.88/226	10.0/254	178/80.8	SAE
MRG-62C	6	1540	1903	365	225	10.7/272	7.38/187	10.5/275	11.6/295	80/36.3	SAE & Studs

* Minutes of reserve capacity with a 25 amp load to 10.5 volts.

THE MARINE-RV GEL ADVANTAGE

- Shock absorbent polypropylene plastic. Resistant to extreme temperatures and vibration.
- Thermally welded cover to case. Eliminates the risk of both acid and electrical leaks.
- Maintenance free construction. Needs no water additions and will not allow electrolyte spills.
- Advanced GEL design. Provides deep cycle capability throughout the life of the battery.
- Oversized internal components. Insures minimal voltage drop and more power availability.
- Industrial grade battery plates.
- Each battery is equipped with lifting handles.
- Each cell has a pressure release venting system to prevent explosions, when operated in normal conditions.
- Can be used in any position, except upside down.
- 100% recyclable materials.

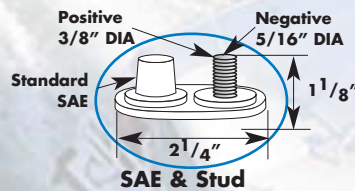

Options

- Battery cables and harnesses.
- Battery boxes.
- Other models available.



No transport restrictions

- Surface transport. Classified as non-hazardous material as relates to DOT-CFR Title 49 parts 171-189.
- Maritime transport. Classified as non-hazardous material as per IMDG amendment 27.
- Air transport. Complies with IATA / ICAO, special provision A67.

1553-1-0902

U.S.A.
Power Battery Company, Inc.
25 McLean Blvd.
Paterson, N.J. 07514-1507
Phone: (973) 523-8630
Fax: (973) 523-3023
E-mail: sales@powbat.com
Website: www.powerbattery.com

CANADA
Power Battery (Iberville) Ltd.
770 Thomas Ave.
Saint-Jean-sur-Richelieu, Québec, J2X 5E7
Phone: (450) 346-3273
Fax: (450) 346-8003
E-mail: sales@powbat.com
Website: www.powerbattery.com

UK
Power Batteries Ltd.
Premier Way, Abbey Park Industrial Estate
Romsey, Hampshire, SO51 9AQ
Phone: +44 (0)1794 835900
Fax: +44 (0)1794 835910
E-mail: sales@powbat.co.uk
Website: www.powbat.co.uk