

MST Series

6kVA



Features

- Double Conversion
- On-Line Batteries
- VFI - Volt Frequency Independent (EN50091-3)
- Inverter Isolation Transformer
- Static Switch
- DC Start
- Rectifier/Charger for Extended Backup Time
- Battery Current Limit Circuit for Safe Battery Charge
- LED Display
- Alarm Dry Contacts Relay
- Automatic and Manual Battery Test
- RS232 Interface for Smart Software and SNMP Management
- PSM-AC Universal Management Application (option)


On-Line Double Conversion UPS with Static Switch

The MST is a small, attractive, compact and reliable UPS, in the power capacity of 6kVA.

The MST series is a classic Double Conversion On-Line UPS with an inverter isolation transformer and static switch. The separate battery enclosures allow flexibility in backup time.

Double Conversion True On-Line Battery (VFI)

According to IEC 62040-3

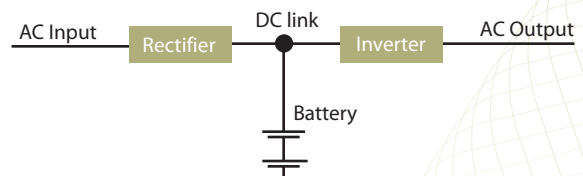

Our Power, Your Confidence

MST Series Specifications

INPUT	
Voltage	230V/220V
Voltage Range	10% - 15%
Frequency	50/60Hz±3Hz
Power Walk-In	5 sec.
Protection	Circuit Breaker; RFI filter(option)
OUTPUT	
Voltage	230V/220V No DC Component
Regulation (at normal input)	±2% (±1% optional)
Freq. Tracking Range	±2Hz
Slew Rate	1Hz/sec
Overload	125% 10 min. 150% 30 sec. 1000% 1 cycle
Load PF	0.7
Waveform	Pure sinusoidal
THD	Less than 2% (at linear load)
Crest Factor	3:1
Protection	Overload and short circuit
Dynamic Response on 100% Load Change	±2%
Transition Time from STSW to Inverter and Vice Versa	Less than 0.5 msec.
Rejection Ratio	More than 100dB
Audible Noise (dB) at 1.5m distance	51
ENVIRONMENT	
Ambient Temperature	
Operating	0°C to 40°C
Storage	-20°C to 60°C
Relative Humidity	95% max. Non-condensation
Altitude	1500m w/o derating
UPS Standards	
General & Safety	EN50091-1
EMC	EN50091-2
Design	ENV50091-3
MTBF	100,000 hrs. 250,000 hrs. with static switch
INDICATIONS	
Output load via 7 LED bar graph	
Audio Alarm	
Battery OK	
Line OK	
Bypass/ Inverter	
OPTIONS	
Extended Battery Backup	
Other Voltage/Frequency	
Bypass Isolation	
COMMUNICATION OPTIONS	
RS232 Interface	For shutdown & SNMP
Alarm Interface	Systems shutdown, 3 dry contacts
GMaC	Gamatronic's management card
WING	Gamatronic's wireless card
PSM-AC Universal	Management application

MODEL	6kVA
INPUT	
Voltage	220/230V
Required External Input MCB	32A
OUTPUT	
Voltage	220/230V
Power	6kVA 4.2kW
Efficiency Ac-Ac	
100% load (%)	85
50% load (%)	84
Full Load Heat Dissipation (W) (1W=3.4 BTU/h)	741
Inverter Efficiency at full load (%)	91
BACKUP OPERATION	
Backup (min):	
100% load	4
50% load	12
Battery Charging Time	approx 4 hrs
Batteries (12Vdc each)	External 16 x up to 200Ah
Batteries Voltage	216Vdc
Maximum Charging Current (configurable)	20A
PHYSICAL	
UPS	
Size (cm) H	26
W	19
D	67
Weight (Kg)	47
Batteries Cabinet (16x5AH)	
Size (cm) H	10
W	19
D	60
Weight (Kg)	33

*All specifications are typical and subject to change without prior notice

GAMATRONIC ELECTRONIC INDUSTRIES LTD.

Headquarters and Factory

14 Hartom St. POB 45029, Jerusalem 97774, Israel
Tel: +972-2-5888222 Fax: +972-2-5828875
e-mail: info@gamatronic.co.il www.gamatronic.com

Tel-Aviv Sales Office

34 Habarzel St. Ramat Hachayal, Tel Aviv, Israel
Tel: +972-3-6499940 Fax: +972-3-6449791

Gamatronic UK Ltd.

15 Chester Road, Colmworth Business Park, Eaton
Socon, Cambridgeshire, PE19 8YT, United Kingdom
Tel: +44 (0)1480 479889/ 472665 Fax: +44(0)1480
407865 info@gamatronic.net

September 2008